

SMITH, GAMBRELL & RUSSELL, LLP

ATTORNEYS AT LAW

SUITE 800

1850 M STREET, N.W.

WASHINGTON, D.C. 20036

TELEPHONE

(202) 659-2811

FACSIMILE

(202) 659-1462

WEBSITE

www.sgrlaw.com

ATLANTA OFFICE

SUITE 3100, PROMENADE II

1230 PEACHTREE STREET, N.E.

ATLANTA, GEORGIA 30309-3592

(404) 815-3500

FACSIMILE (404) 815-3509

June 26, 2000

Asst. Commissioner of Patents  
Washington, D.C. 20231

**PATENT APPLICATION TRANSMITTAL LETTER**

Inventor(s): Tomoaki WATAHIKI et al.

RESOURCE RESERVATION MANAGEMENT APPARATUS

Attorney Docket No.: 33216M047

Sir:

Transmitted herewith for filing are the following:

New patent application including 28 pages of text, 9 sheets of formal drawings, signed Declaration, Recordation Cover Sheet and signed Assignment, Information Disclosure Statement, PTO-1449 Form w/2 attached references, Claim For Foreign Priority with attached certified copy of the Japanese Patent Application and a check for \$1,170.00.

Counsel's check for the fee which has been calculated as shown below.

Basic Fee	\$ 690.00
Additional Claims Fee	\$ 180.00
Multiple Dependent Claims Fee	\$ 260.00
Assignment Fee	<u>\$ 40.00</u>
<b>TOTAL:</b>	<b>\$1,170.00</b>

Asst. Commissioner of Patents


June 26, 2000

Page 2

If any additional fees associated with this communication are required, please notify the undersigned attorney by telephone and charge the fees to Deposit Account 02-4300. This includes, for example, any additional filing fees required under 37 CFR 1.16 and any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

By



Michael A. Makuch

Reg. No. 32,263

02-4300-1136E0150

## SPECIFICATION

### TITLE OF THE INVENTION

Resource reservation management apparatus

### BACKGROUND OF THE INVENTION

#### 1. Field of the invention

The present invention relates to a resource reservation management apparatus used in an AV network, where AV apparatuses are connected, for transferring data streams among the AV apparatuses.

#### 2. Related art of the invention

A resource management apparatus of the prior art will be described below with reference to accompanying drawings, taking an isochronous resource manager of the IEEE1394 standard.

Fig.8 shows the constitution of the resource management apparatus of the prior art. In Fig.8, reference numeral 801 denotes the resource management apparatus, 802 denotes a frequency band management table, 803 denotes a channel management table, 804 denotes a controller and 805 denotes a communication interface.

The resource management apparatus 801 performs a function of managing network resources to ensure correct transmission of AV data stream. Fig.9 shows an example of the AV network constitution provided with the resource management apparatus 801.

The resource management apparatus 801 of the prior art

does not perform prospective resource management that takes into account future events. That is, upon receipt of a frequency band allocation request from a user, the resource management apparatus 801 checks frequency bands currently not in use stored in the frequency band resource management table 802, and compares them with the requested frequency band. In case the frequency band can be allocated, the controller 804 notifies the user of the permission of allocation, while the frequency band resource management table 802 is updated at the same time.

Upon receipt of a channel allocation request, on the other hand, the channel management table 803 is checked for an unused channel registered therein, with an available channel being notified to the user and the channel management table 803 being updated.

The user transfers the AV data stream using the assigned channel within the frequency band permitted.

In Fig.9, reference numeral 901 denotes the resource management apparatus 801, 902 denotes a set-top box (hereinafter STB), 903 denotes a video cassette recorder (hereinafter VCR) and 904 denotes an AV data stream.

When video recording of a digital broadcast program received with the STB 902 by means of the VCR 903 is to be reserved, the resource management apparatus 901 starts by retrieving program starting/ending time information from an electronic program guide (hereinafter EPG).

When the reservation start time comes, the STB 902 acquires a currently available network resource that is monitored by the resource management apparatus 901, for the first time as described above, and sends an AV data stream 904 from the STB 902 using an isochronous packet.

Then the VCR 903 is enabled to receive and record the AV data stream 904.

However, there has been such problems as described below with the constitution described above.

When a user (A) reserves at 10:00 a.m. video recording for time period of 8:00 to 10:00 p.m. and another user (B) reserves at 11:00 a.m. video recording for time period of 7:00 to 9:00 p.m., the video recording of the user (B) is performed at 7:00 to 9:00 p.m. to consume full frequency band, and therefore the video recording for the user (A) can not be performed. That is user (A) who reserved before the user (B) can not record on account of the user (B) who reserved after the user (A).

#### SUMMARY OF THE INVENTION

The present invention aims at solving the problems described above, and an object thereof is to provide a network resource reservation management apparatus that is capable of reserving network resources.

The 1<sup>st</sup> invention of the present invention (corresponding to claim 1) is a resource reservation management apparatus for

AV network that manages equipment resources connected to a network, comprising:

EPG processing means for acquiring starting/ending time information of a broadcast program from EPG (electronic program guide) that is sent while being superimposed on the broadcast wave;

frequency band information processing means for acquiring the frequency band information of the broadcast program;

frequency band resource management means for performing time management of the frequency band resource of the AV network by using a resource reservation management table;

a controller that, upon receiving a reservation request, acquires the frequency band of a reserved program of the request from said frequency band information processing means and the starting/ending time information of the reserved program from said EPG processing means and, with reference to said resource reservation management table, determines whether the frequency band of the reserved program can be allocated so that, when the frequency band can be allocated, reservation of the frequency band is registered in said resource reservation management table, and

communication via a communication interface using allocated secured frequency band is carried out when the start time of the reserved program is reached.

The 2<sup>nd</sup> invention of the present invention (corresponding

to claim 2) is a resource reservation management apparatus as described in the 1<sup>st</sup> invention, wherein

said frequency band information processing means acquires the frequency band information of the broadcast program with superimposed on said broadcast wave.

The 3<sup>rd</sup> invention of the present invention (corresponding to claim 3) is a resource reservation management apparatus as described in the 1<sup>st</sup> invention, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program via the Internet.

The 4<sup>th</sup> invention of the present invention (corresponding to claim 4) is a resource reservation management apparatus as described in the 1<sup>st</sup> invention, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program from communication equipment.

The 5<sup>th</sup> invention of the present invention (corresponding to claim 5) is a resource reservation management apparatus as described in the 1<sup>st</sup> invention, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program from a recording medium.

The 6<sup>th</sup> invention of the present invention (corresponding to claim 6) is a resource reservation management apparatus as

described in the 1<sup>st</sup> invention, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program from information input by a user.

The 7<sup>th</sup> invention of the present invention (corresponding to claim 7) is a resource reservation management apparatus as described in any of the 1<sup>st</sup> through 6<sup>th</sup> inventions, wherein

in case transmission of a program is requested without reservation, said controller makes reference to said resource reservation management table thereby to determine whether the requested frequency band of the broadcast program can be allocated and, when the frequency band can be allocated, records the reservation of the frequency band in said resource reservation management table.

The 8<sup>th</sup> invention of the present invention (corresponding to claim 8) is a resource reservation management apparatus as described in any of the 1<sup>st</sup> through 6<sup>th</sup> inventions, wherein

a non-reservable frequency band is provided in said resource reservation management table.

The 9<sup>th</sup> invention of the present invention (corresponding to claim 9) is a medium that carries programs and/or data for achieving all or part of the functions of all or part of the means of the resource reservation management apparatus as described in any of the 1<sup>st</sup> through 6<sup>th</sup> inventions and can be processed by means of a computer.



The 10<sup>th</sup> invention of the present invention (corresponding to claim 10) is an information complex comprising programs and/or data for achieving all or part of the functions, of all or part of the means of the resource reservation management apparatus as described in any of the 1<sup>st</sup> through 6<sup>th</sup> inventions, by means of a computer.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 shows the constitution of a resource reservation management apparatus according to the first embodiment of the present invention.

Fig.2 shows the constitution of a resource reservation management apparatus according to the second embodiment of the present invention.

Fig.3 shows the constitution of a resource reservation management apparatus according to the third embodiment of the present invention.

Fig.4 shows the constitution of a resource reservation management apparatus according to the fourth embodiment of the present invention.

Fig.5 shows the constitution of a resource reservation management apparatus according to the fifth embodiment of the present invention.

Fig.6 shows an example of constitution of an AV network provided with the resource reservation management apparatus

according to the above embodiments of the present invention.

Fig.7 shows an example of constitution of a resource reservation management table according to the above embodiment of the present invention.

Fig.8 shows the constitution of a resource management apparatus of the prior art.

Fig.9 shows the constitution of an AV network provided with the resource management apparatus of the prior art.

#### DESCRIPTION OF REFERENCE NUMERALS

101: Resource reservation management apparatus

102: Tuner

103: EPG processing means

104: Timer

105: Frequency band information processing means

106: Resource reservation management table

107: Controller

108: Communication interface

201: Resource reservation management apparatus

202: Tuner

203: Modem

204: EPG processing means

205: Timer

206: Frequency band information processing means

207: Resource reservation management table

208: Controller  
209: Communication interface  
301: Resource reservation management apparatus  
302: Tuner  
303: Communication equipment  
304: EPG processing means  
305: Timer  
306: Frequency band information processing means  
307: Resource reservation management table  
308: Controller  
309: Communication interface  
401: Resource reservation management apparatus  
402: Tuner  
403: Recording medium  
404: EPG processing means  
405: Timer  
406: Frequency band information processing means  
407: Resource reservation management table  
408: Controller  
409: Communication interface  
501: Resource reservation management apparatus  
502: Tuner  
503: Paper medium  
504: EPG processing means  
505: Timer

506: Frequency band information processing means  
 507: Resource reservation management table  
 508: Controller  
 509: Communication interface  
 601: Resource reservation management apparatus  
 602: Set-top box (STB)  
 603: Video cassette recorder (VCR)  
 604: AV data stream  
 701: Reservable frequency band  
 702: Non-reservable frequency band  
 703: Reserved frequency band  
 704: Newly reserved frequency band  
 801: Resource management apparatus  
 802: Frequency band management table  
 803: Channel management table  
 804: Controller  
 805: Communication interface  
 901: Resource management apparatus  
 902: Set-top box (STB)  
 903: Video cassette recorder (VCR)  
 904: AV data stream

#### PREFERRED EMBODIMENTS

(Embodiment 1)

A resource reservation management apparatus according to

the first embodiment of the present invention will now be described below with reference to the accompanying drawings.

Fig.1 shows the constitution of the resource reservation management apparatus according to the first embodiment of the present invention. In Fig.1, reference numeral 101 denotes the resource reservation management apparatus, 102 denotes a tuner, 103 denotes EPG processing means, 104 denotes a timer, 105 denotes frequency band information processing means, 106 denotes a resource reservation management table, 1060 denotes frequency band resource management means that manages the frequency band resources by means of the resource reservation management table 106, 107 denotes a controller and 108 denotes a communication interface.

Operation of the resource reservation management apparatus of this embodiment constituted as described above will be described below.

First, the tuner 102 receives broadcast wave that includes the EPG. In the resource reservation management apparatus 101, the EPG processing means 103 extracts program starting/ending time information from the EPG. The time information extracted is managed by the timer 104. On the other hand, frequency band information of the program is extracted by the frequency band information processing means 105 from the broadcast wave. A broadcast station transmits the frequency band information of the programs, too by using EPG. The resource reservation

management table 106 stores the frequency band information of a period up to some time in the future.

Upon receipt of a reservation request, the controller 107 acquires the frequency band information and the starting/ending time information of the broadcast program, while making reference to the resource reservation management table 106 to determine whether the frequency band will be available at the time when the program, for which the reservation request has been made, starts. In case the frequency band is available, the controller 107 registers reservation of the frequency band in the resource reservation management table 106 (refer to Fig.7). At the same time, the timer 104 manages the reservation. The reservation request may be made from either an STB 602 to be described later or a VCR 603.

When the reservation time managed by the timer 104 is reached, the resource reservation management apparatus 101 transmits the program received by the tuner 102 via the communication interface 108 by using the frequency band managed in the resource reservation management table 106 and a channel that is idle at the time. In this way the channel that is idle at the time of recording is utilized.

Fig.6 shows an example of AV network constitution provided with the resource reservation management apparatus of the first embodiment of the invention.

In Fig.6, reference numeral 601 denotes the resource

reservation management apparatus, 602 denotes the STB, 603 denotes the VCR and 604 denotes the AV data stream. When a digital broadcast program received by the STB 602 is recorded with the VCR 603 with reservation, the resource reservation management apparatus 601 first acquires the program starting/ending time information and the frequency band from the EPG and manages the reservation by taking time into account.

When the time to start recording is reached, the resource reservation management apparatus 601 transmits the AV data stream 604 using the reserved frequency band and a channel that is idle at the time. The VCR 603, on the other hand, can receive and record the AV data stream 604.

Fig.7 shows an example of constitution of the resource reservation management table of the first embodiment of the invention. In Fig.7, reference numeral 701 denotes a reservable frequency band, 702 denotes a non-reservable frequency band, 703 denotes a reserved frequency band and 704 denotes a newly reserved frequency band.

In the resource reservation management table 106, the total frequency band is divided into the reservable frequency band 701 and the non-reservable frequency band 702, and the information on the current frequency band usage status for both frequency bands is kept, while keeping the information on the frequency band reservation status of a period up to some time in the future for the reservable frequency band.

In this embodiment, 70Mbps out of the total frequency band of 100Mbps is registered as reservable with the rest being non-reservable. In this example, 30Mbps is registered as reserved frequency band 703 for a period from 10 to 11 o'clock, while the controller 107 newly reserves 20Mbps as the newly reserved frequency band 704.

(Embodiment 2)

The resource reservation management apparatus according to the second embodiment of the present invention will now be described below with reference to the accompanying drawings.

Fig.2 shows the constitution of the resource reservation management apparatus according to the second embodiment of the present invention. In Fig.2, reference numeral 201 denotes the resource reservation management apparatus, 202 denotes a tuner, 203 denotes a modem for connecting to the Internet, 204 denotes EPG processing means, 205 denotes a timer, 206 denotes frequency band information processing means, 207 denotes a resource reservation management table, 2070 denotes frequency band resource management means that manages the frequency band resources by means of the resource reservation management table 207, 208 denotes a controller and 209 denotes a communication interface.

Operation of the resource reservation management apparatus of this embodiment constituted as described above will be described below.



First, the tuner 202 receives broadcast wave that includes the EPG. In the resource reservation management apparatus 201, the EPG processing means 204 extracts program starting/ending time information from the EPG. The time information extracted is managed by the timer 205.

On the other hand, frequency band information of the program is acquired by the frequency band information processing means 206 from the Internet via the modem 203. The resource reservation management table 207 stores frequency band information of a period up to some time in the future.

The controller 208 makes reference to the resource reservation management table 207 to determine whether the frequency band will be available at the start time. In case the frequency band is available, the controller 208 registers reservation of the frequency band in the resource reservation management table 207. At the same time, the timer manages the reservation.

When the recording time managed by the timer 205 is reached, the resource reservation management apparatus 201 transmits the program received by the tuner 202 via the communication interface 209 by using the frequency band managed in the resource reservation management table 207 and a channel that is idle at the time.

Fig. 6 shows an example of AV network constitution provided with the resource reservation management apparatus of the second embodiment of the invention. The operation is similar to that

in the first embodiment of the present invention. Fig.7 shows an example of AV network constitution provided with the resource reservation management table of the second embodiment of the present invention. The operation is similar to that in the first embodiment.

(Embodiment 3)

The resource reservation management apparatus according to the third embodiment of the present invention will now be described below with reference to the accompanying drawings.

Fig.3 shows the constitution of the resource reservation management apparatus according to the third embodiment of the present invention. In Fig.3, reference numeral 301 denotes the resource reservation management apparatus, 302 denotes a tuner, 303 denotes communication equipment represented by a telephone, 304 denotes EPG processing means, 305 denotes a timer, 306 denotes frequency band information processing means, 307 denotes a resource reservation management table, 3070 denotes frequency band resource management means that manages the frequency band resources by means of the resource reservation management table 307, 308 denotes a controller and 309 denotes a communication interface.

Operation of the resource reservation management apparatus of this embodiment constituted as described above will be described below.

First, the tuner 302 receives broadcast wave that includes

the EPG. In the resource reservation management apparatus 301, the EPG processing means 304 extracts the starting/ending time information of the program from the EPG. The extracted information is managed by the timer 305.

On the other hand, frequency band information of the program is acquired via the communication equipment 303 such as telephone in the form of voice data that is extracted by the frequency band information processing means 306.

The resource reservation management table 307 stores the frequency band information of a period up to some time in the future. The controller 308 makes reference to the resource reservation management table 307 to determine whether the frequency band will be available at the start time. In case the frequency band is available, the controller 308 registers reservation of the frequency band in the resource reservation management table 307. At the same time, the timer manages the reservation.

When the recording time managed by the timer 305 is reached, the resource reservation management apparatus 301 transmits the program received by the tuner 302 via the communication interface 309 by using the frequency band managed in the resource reservation management table 307 and a channel that is idle at the time.

Fig. 6 shows an example of AV network constitution provided with the resource reservation management apparatus of the third embodiment of the present invention, of which operation is similar

to that in the first embodiment. Fig.7 shows an example of constitution of the resource reservation management table of the third embodiment of the present invention, of which operation is similar to that in the first embodiment.

(Embodiment 4)

The resource reservation management apparatus according to the fourth embodiment of the present invention will now be described below with reference to the accompanying drawings.

Fig.4 shows the constitution of the resource reservation management apparatus according to the fourth embodiment of the present invention. In Fig.4, reference numeral 401 denotes the resource reservation management apparatus, 402 denotes a tuner, 403 denotes a recording medium such as floppy disk or CD-ROM, 404 denotes EPG processing means, 405 denotes a timer, 406 denotes frequency band information processing means, 407 denotes a resource reservation management table, 4070 denotes frequency band resource management means that manages the frequency band resource by means of the resource reservation management table 407, 408 denotes a controller and 409 denotes a communication interface.

Operation of the resource reservation management apparatus of this embodiment constituted as described above will be described below.

First, the tuner 402 receives broadcast wave that includes the EPG. In the resource reservation management apparatus 401,

the EPG processing means 404 extracts the starting/ending time information of the program from the EPG. The time information that is extracted is managed by the timer 405.

On the other hand, the frequency band information of the program can be extracted from the recording medium 403 by the frequency band information processing means 406. The resource reservation management table 407 stores the frequency band information of a period up to some time in the future.

The controller 408 makes reference to the resource reservation management table 407 to determine whether the frequency band will be available at the start time. In case the frequency band is available, the controller 408 registers reservation of the frequency band in the resource reservation management table 407. At the same time, the timer manages the reservation.

When the recording time managed by the timer 405 is reached, the resource reservation management apparatus 401 transmits the program received by the tuner 402 via the communication interface 409 by using the frequency band managed in the resource reservation management table 407 and a channel that is idle at the time.

Fig.6 shows an example of AV network constitution provided with the resource reservation management apparatus of the fourth embodiment of the present invention, of which operation is similar to that in the first embodiment. Fig.7 shows an example of constitution of the resource reservation management table of the

fourth embodiment of the present invention, of which operation is similar to that in the first embodiment.

(Embodiment 5)

The resource reservation management apparatus according to the fifth embodiment of the present invention will now be described below with reference to the accompanying drawings.

Fig.5 shows the constitution of the resource reservation management apparatus according to the fifth embodiment of the present invention. In Fig.5, reference numeral 501 denotes the resource reservation management apparatus, 502 denotes a tuner, 503 denotes a paper medium such as book or news paper, 504 denotes EPG processing means, 505 denotes a timer, 506 denotes frequency band information processing means, 507 denotes a resource reservation management table, 5070 denotes frequency band resource management means that manages the frequency band resource by means of the resource reservation management table 507, 508 denotes a controller and 509 denotes a communication interface.

Operation of the resource reservation management apparatus of this embodiment constituted as described above will be described below.

First, the tuner 502 receives broadcast wave that includes the EPG. In the resource reservation management apparatus 501, the EPG processing means 504 extracts the starting/ending time information of the program from the EPG. The time information

that has been extracted is managed by the timer 505.

On the other hand, the frequency band information of the program is entered by a user with reference to the paper medium 503.

The information entered can be extracted by the frequency band information processing means 506. The resource reservation management table 507 stores the frequency band information of a period up to some time in the future.

The controller 508 makes reference to the resource reservation management table 507 to determine whether the frequency band will be available at the start time. In case the frequency band is available, the controller 508 registers reservation of the frequency band in the resource reservation management table 507. At the same time, the timer manages the reservation.

When the recording time managed by the timer 505 is reached, the resource reservation management apparatus 501 transmits the program received by the tuner 502 via the communication interface 509 by using the frequency band managed in the resource reservation management table 507 and a channel that is idle at the time.

Fig.6 shows an example of AV network constitution provided with the resource reservation management apparatus of the fifth embodiment of the present invention, of which operation is similar to that in the first embodiment. Fig.7 shows an example of constitution of the resource reservation management table of the

fifth embodiment of the invention, of which operation is similar to that in the first embodiment.

Although the channel is not secured when making reservation in the embodiments described above, a channel may be reserved when reserving the frequency band resource as other embodiment.

When there is a command for recording a program immediately without reservation, reference is made to the resource reservation management table to determine whether a channel is available at the time. When available, a program received by the tuner is transmitted via the communication interface to a video recording apparatus using an idle channel.

Although the present invention can be embodied by means of hardware circuit, it can also be embodied in the form of software by using a computer.

The present invention also provides a medium that stores programs for achieving all or part of the functions of the means described above by means of a computer.

The term "data" used herein includes the structure, format, type and other aspects of data.

The term "medium" used herein includes recording medium such as ROM, communication medium such as Internet and transmission medium such as light, electromagnetic wave, sound, etc.

Carrying medium includes, for example, a recording medium carrying programs and/or data recorded thereon and a transmission



medium through which programs and/or data are transmitted.

Processibility with a computer means that the information can be read by a computer in the case of a recording medium such as ROM, and that the programs and/or data to be transmitted can be handled with a computer as a result of transmission in the case of a transmission medium.

Information complex includes software such as programs and/or data.

According to the present invention, as described above, the frequency band information can be acquired efficiently. And it is made possible to avoid disparity in the opportunity due to differences in the order in the time of reservation and in the order of recording.

WHAT IS CLAIMED IS:

1. A resource reservation management apparatus for AV network that manages equipment resources connected to a network, comprising:

EPG processing means for acquiring starting/ending time information of a broadcast program from EPG (electronic program guide) that is sent while being superimposed on the broadcast wave;

frequency band information processing means for acquiring the frequency band information of the broadcast program;

frequency band resource management means for performing time management of the frequency band resource of the AV network by using a resource reservation management table;

a controller that, upon receiving a reservation request, acquires the frequency band of a reserved program of the request from said frequency band information processing means and the starting/ending time information of the reserved program from said EPG processing means and, with reference to said resource reservation management table, determines whether the frequency band of the reserved program can be allocated so that, when the frequency band can be allocated, reservation of the frequency band is registered in said resource reservation management table, and

communication via a communication interface using allocated secured frequency band is carried out when the start

time of the reserved program is reached.

2. A resource reservation management apparatus as described in claim 1, wherein

said frequency band information processing means acquires the frequency band information of the broadcast program with superimposed on said broadcast wave.

3. A resource reservation management apparatus as described in claim 1, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program via the Internet.

4. A resource reservation management apparatus as described in claim 1, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program from communication equipment.

5. A resource reservation management apparatus as described in claim 1, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program from a recording medium.

6. A resource reservation management apparatus as described in claim 1, wherein

said frequency band information processing means acquires the frequency band information of said broadcast program from

information input by a user.

7. A resource reservation management apparatus as described in any of claims 1 through 6, wherein

in case transmission of a program is requested without reservation, said controller makes reference to said resource reservation management table thereby to determine whether the requested frequency band of the broadcast program can be allocated and, when the frequency band can be allocated, records the reservation of the frequency band in said resource reservation management table.

8. A resource reservation management apparatus as described in any of claims 1 through 6, wherein

a non-reservable frequency band is provided in said resource reservation management table.

9. A medium that carries programs and/or data for achieving all or part of the functions of all or part of the means of the resource reservation management apparatus as described in any of claims 1 through 6 and can be processed by means of a computer.

10. An information complex comprising programs and/or data for achieving all or part of the functions, of all or part of the means of the resource reservation management apparatus as described in any of claims 1 through 6, by means of a computer.

ABSTRACT

A resource reservation management apparatus for AV network that manages equipment resources connected to a network, has:

EPG processing means for acquiring starting/ending time information of a broadcast program from EPG (electronic program guide) that is sent while being superimposed on the broadcast wave;

frequency band information processing means for acquiring the frequency band information of the broadcast program;

frequency band resource management means for performing time management of the frequency band resource of the AV network by using a resource reservation management table;

a controller that, upon receiving a reservation request, acquires the frequency band of a reserved program of the request from said frequency band information processing means and the starting/ending time information of the reserved program from said EPG processing means and, with reference to said resource reservation management table, determines whether the frequency band of the reserved program can be allocated so that, when the frequency band can be allocated, reservation of the frequency band is registered in said resource reservation management table, and

communication via a communication interface using

allocated secured frequency band is carried out when the start time of the reserved program is reached.

1  
2  
3  
4

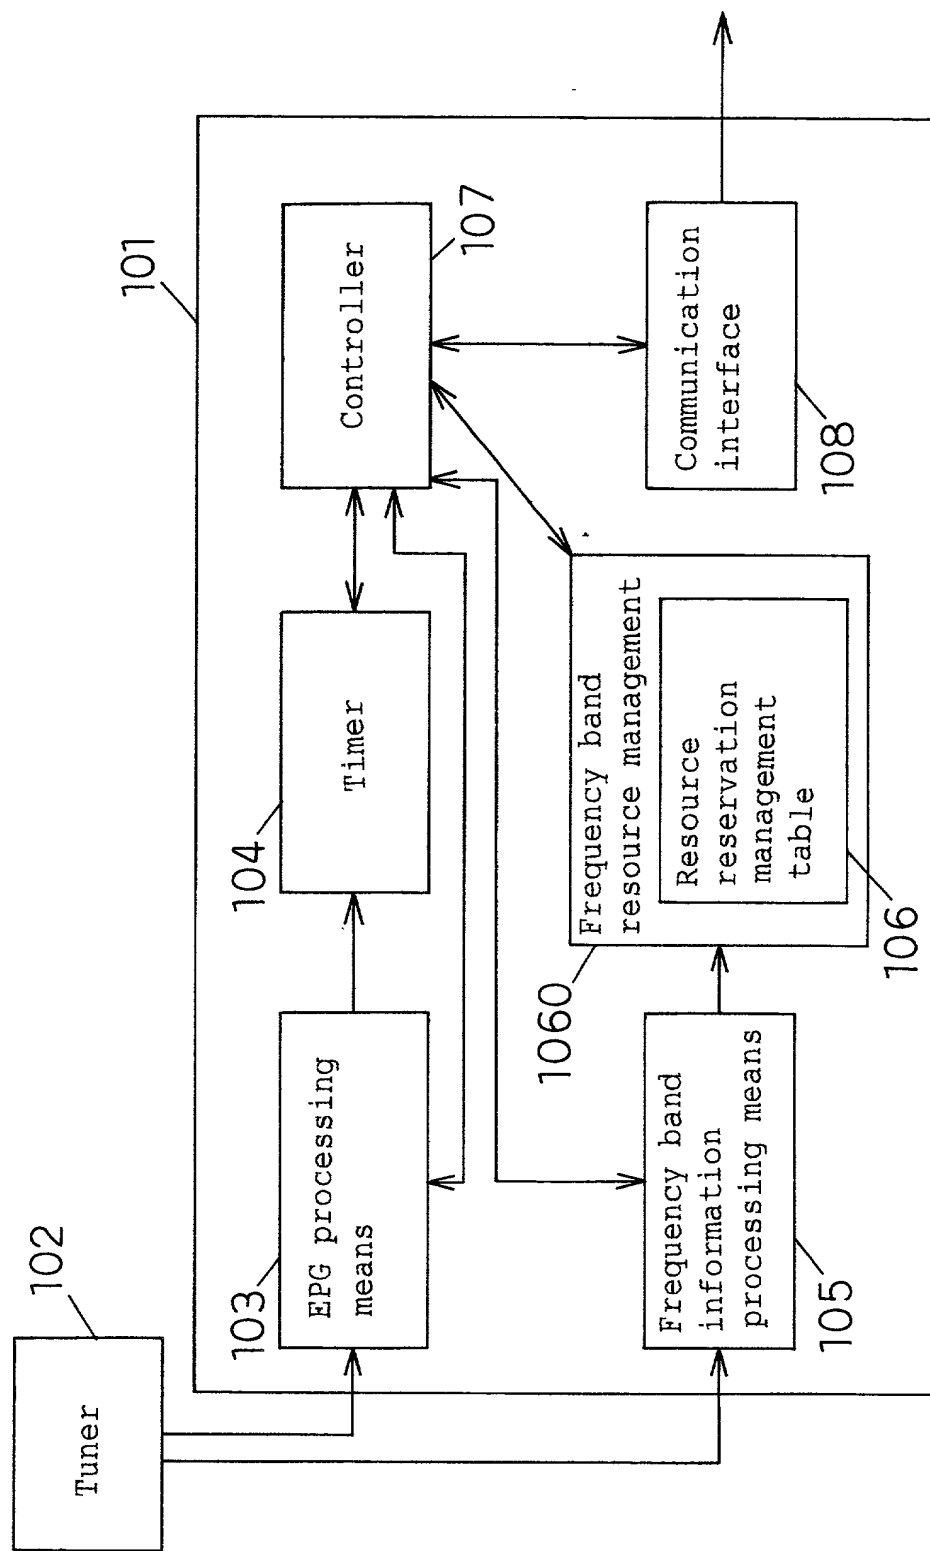


Fig. 2

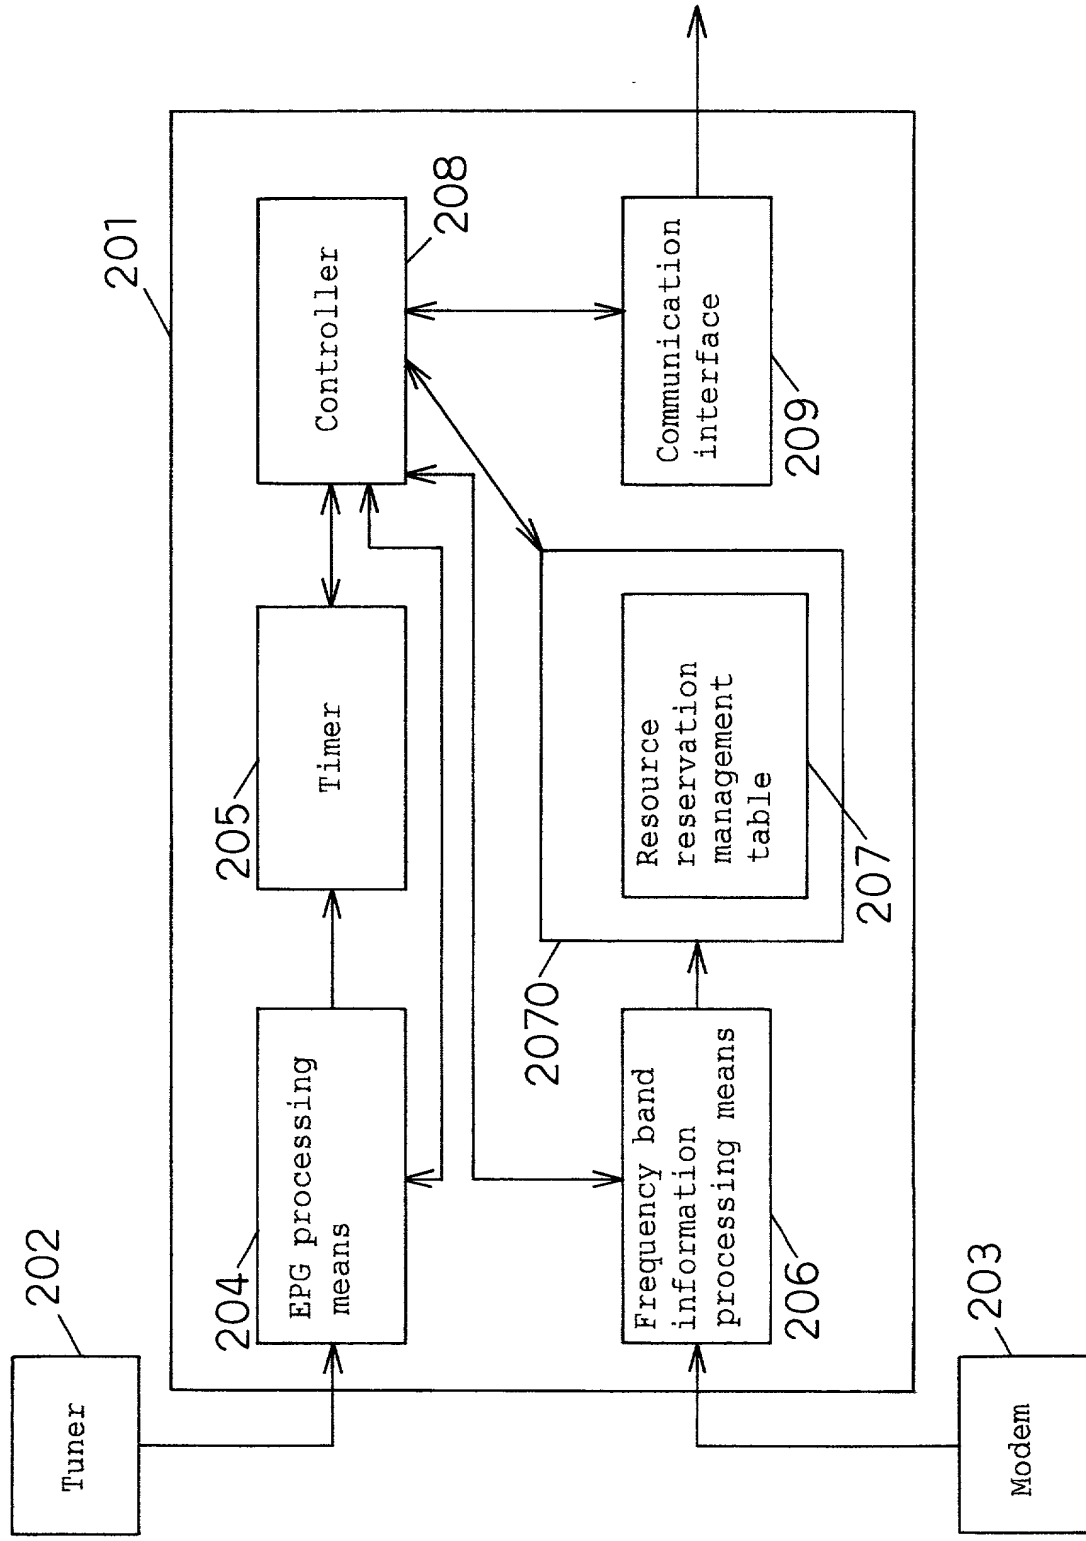




Fig. 3

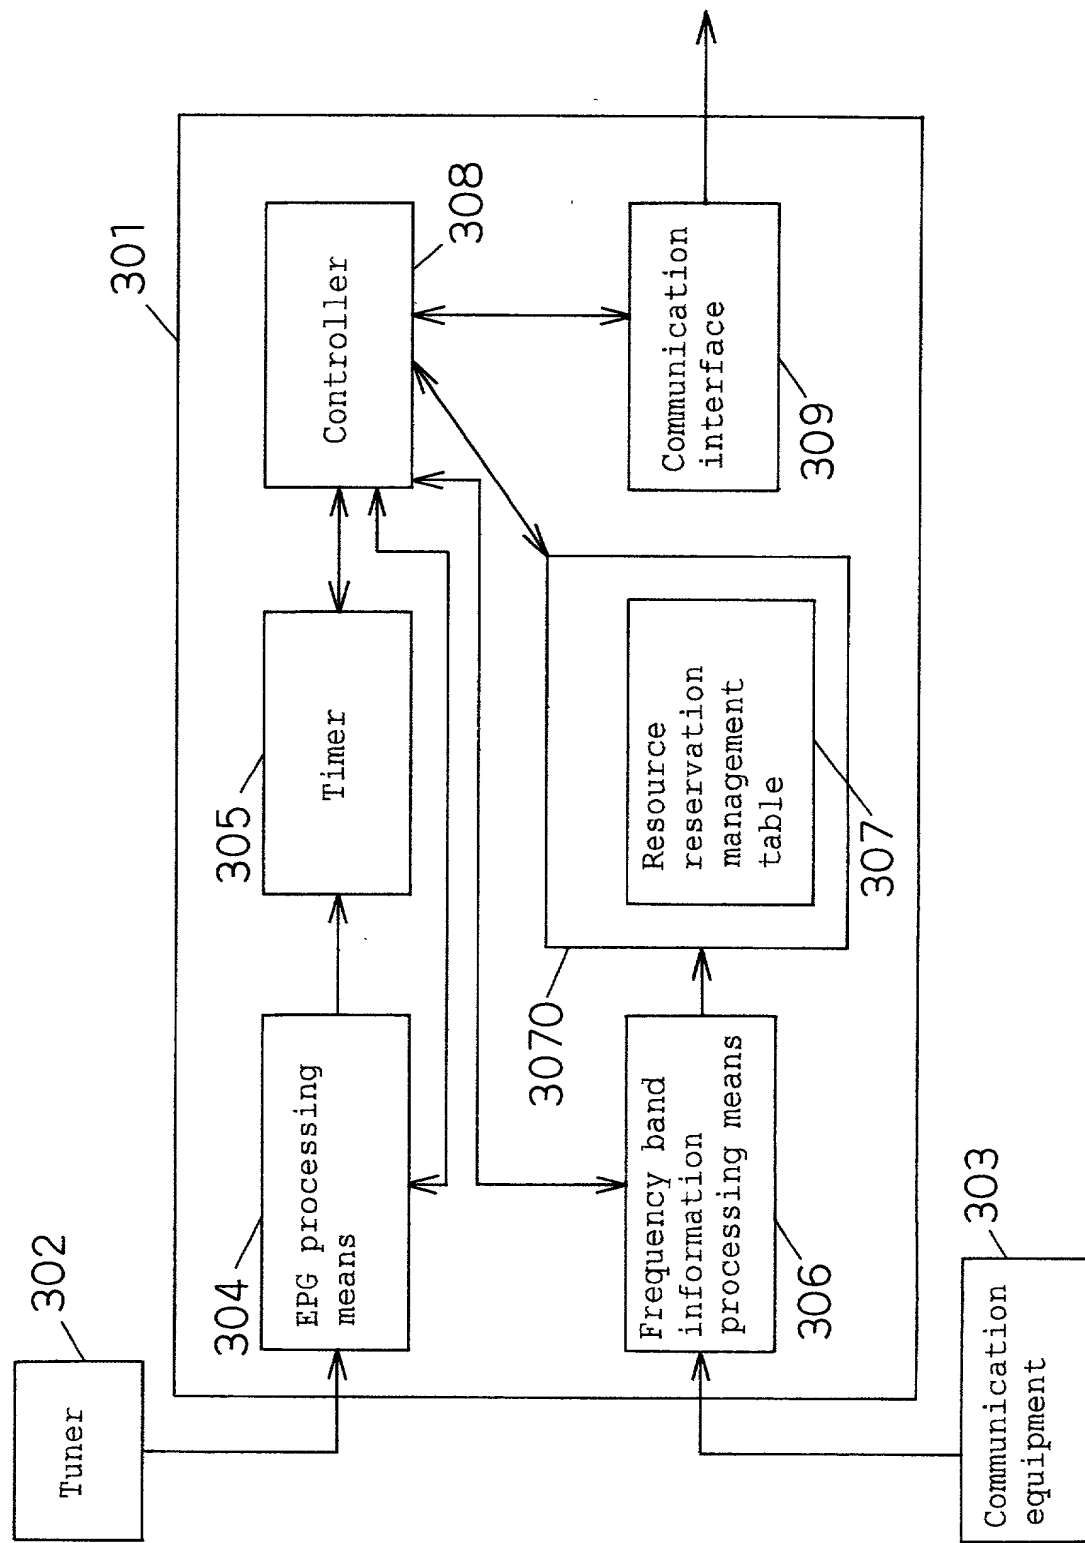




Fig. 5

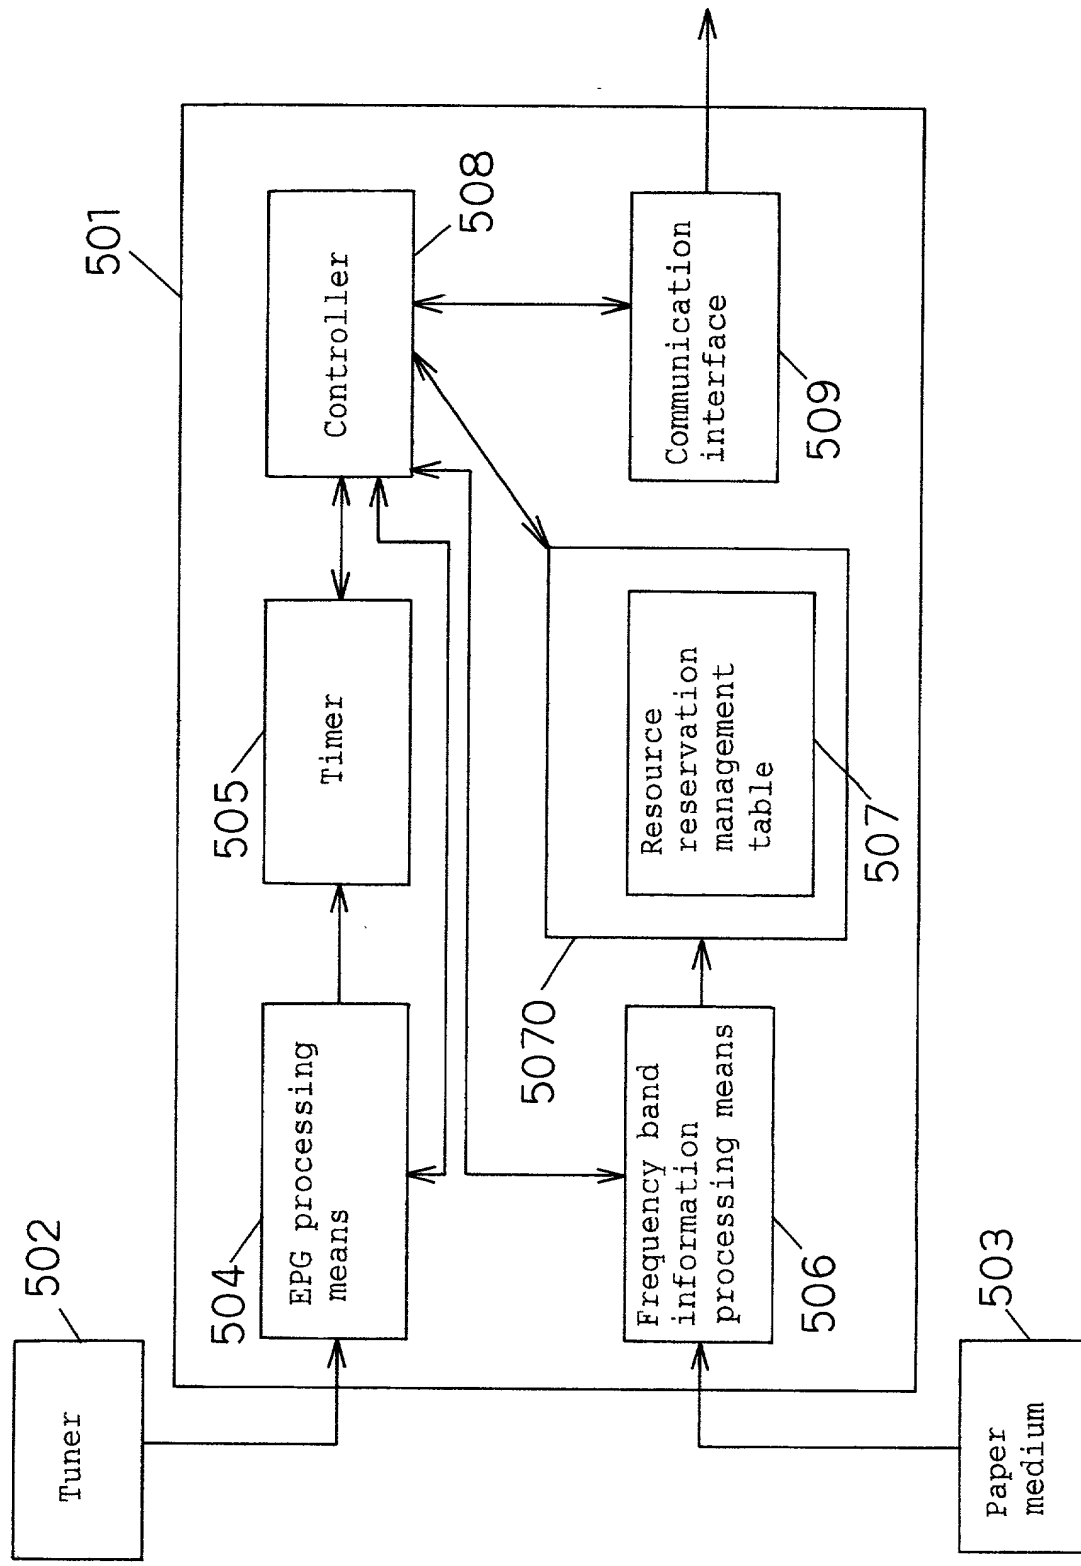


Fig. 6

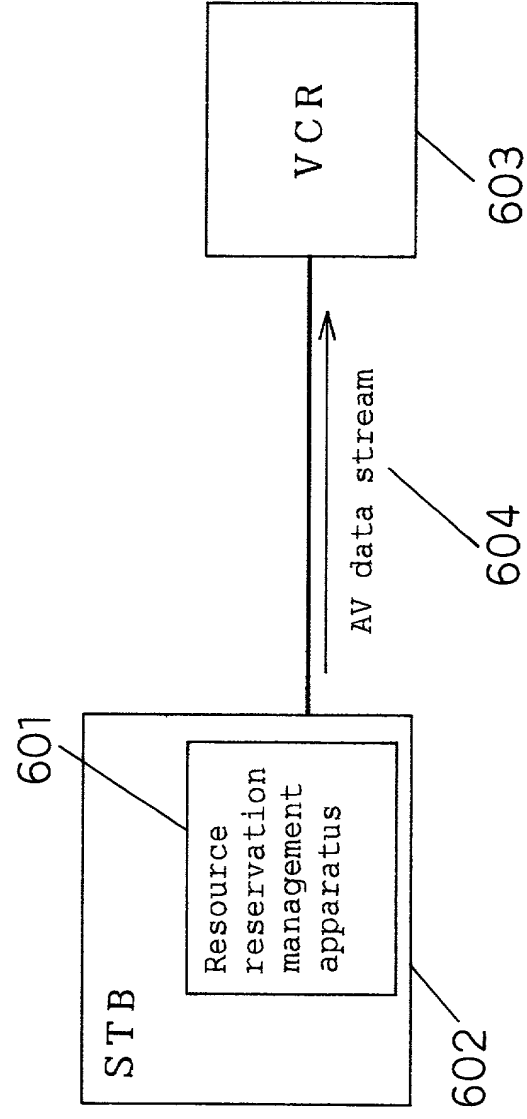


Fig. 7

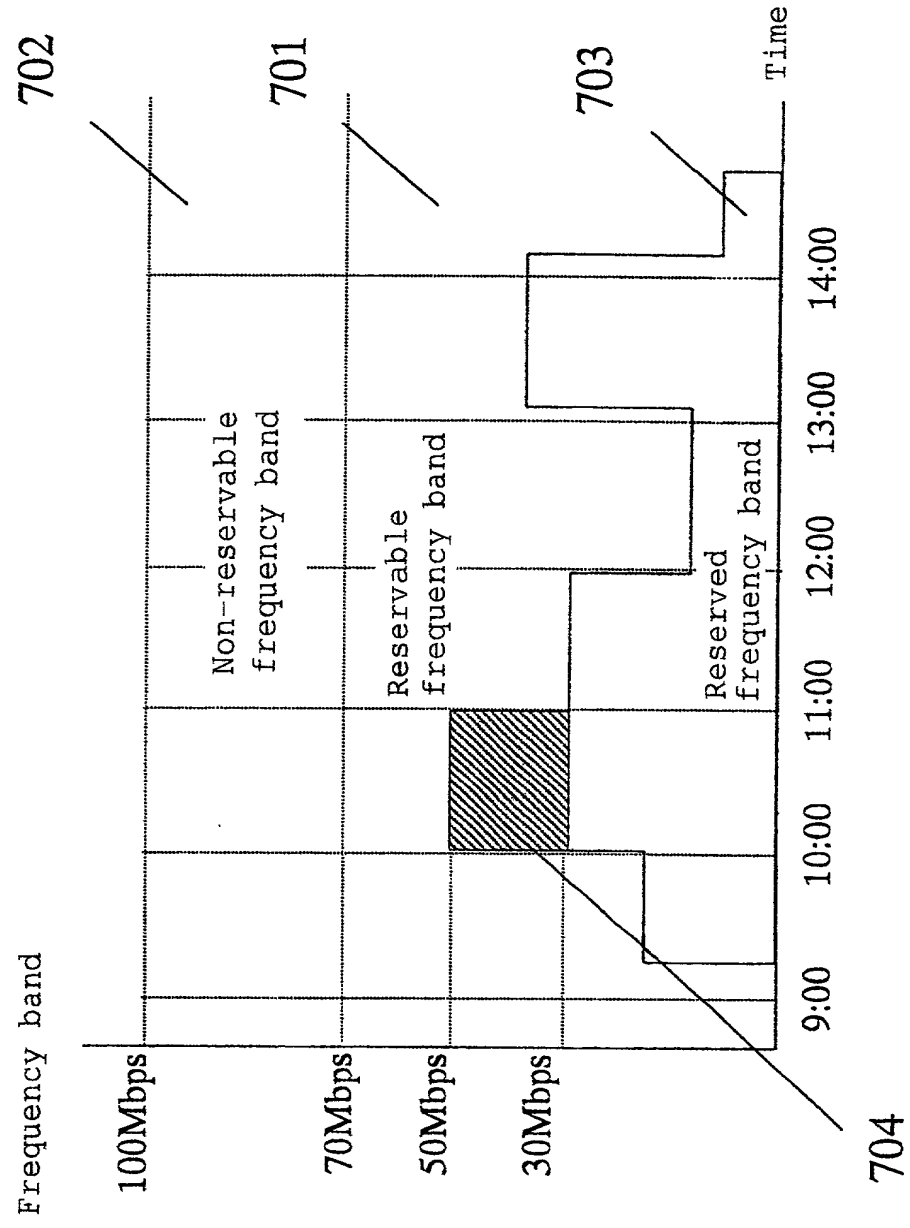


Fig. 8


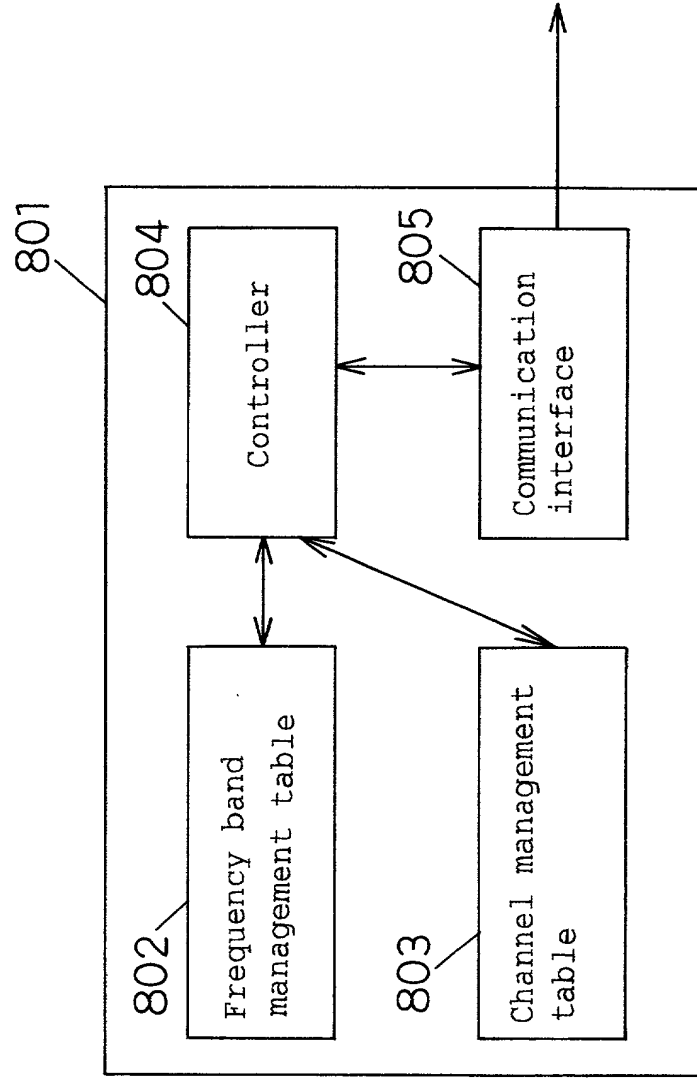


Fig. 9

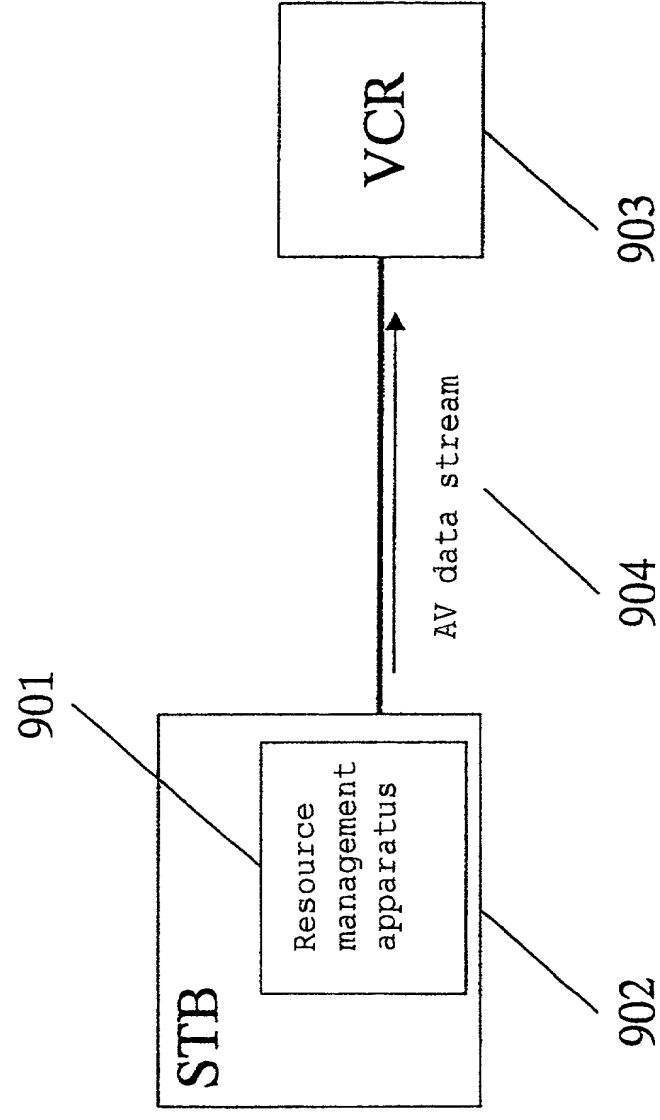

# Declaration and Power of Attorney United States Patent Application

UNITED STATES (Form BDWY-1)  
Patents and Design Patents  
Sole & Joint Inventors  
Convention & Non-convention  
PCT & Non-PCT  
This form cannot be amended, altered  
or changed after it is signed.  
(For use only for inventors who  
understand the English language.)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

RESOURCE RESERVATION MANAGEMENT APPARATUS

(check one) ☒ is attached hereto.

☐ was filed as U.S. Application No. \_\_\_\_\_ on \_\_\_\_\_ and (if applicable) was amended on \_\_\_\_\_.

☐ was filed as PCT International Application No. \_\_\_\_\_ on \_\_\_\_\_ and (if applicable) was amended under PCT Article 19 on \_\_\_\_\_.

(I authorize any attorney appointed below to insert information in the preceding blanks.)

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign and PCT application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America listed in this Declaration. I have also identified below any foreign application for patent or inventor's certificate or PCT international application having a filing date before that of the application(s) on which priority is claimed:

Foreign/PCT Application No.	Country	Filing Date	Priority Claimed? (yes/no)
H11-184,295	JAPAN	June 29, 1999	YES

I hereby claim the benefit under Title 35, United States Code, §120 or §365(c) of any United States application and PCT international application designating the United States of America listed in this Declaration and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Application No.	Filing Date	Status (patented/pending/abandoned?)

I hereby claim priority benefits under Title 35 United States Code §119(e) of any U.S. provisional application(s) listed below:

U.S. Provisional Application No.	Filing Date

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph A. DeGrandi (17446), Robert G. Weilacher (20531), Richard G. Young (20628), Michael A. Makuch (32263), Dennis C. Rodgers (32936), Thomas L. Evans (35805), Frank C. Cimino, Jr. (39945), Carolyn Favorito (39183), George A. Metzenthin (P41995), and Steven W. Collier (P42429).

Send all correspondence to Beveridge, DeGrandi, Weilacher & Young, L.L.P., Suite 800, 1850 M Street, N.W., Washington, D.C. 20036. Facsimiles may be sent to (202) 659-1462. Direct all telephone calls to (202) 659-2811.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Tomoaki WATAHIKI

Citizenship: JAPAN

Residence (city, state, country): Takatsuki-shi, Osaka JAPAN

Post office address: 7-1-302, Miyancho, Takatuki-shi, Osaka 569-0081 JAPAN

Signature: Tomoaki Watahiki Date: June 9, 2000

Full name of second joint inventor, if any: Hajime MAEKAWA

Citizenship: JAPAN

Residence (city, state, country): Osaka-shi, Osaka JAPAN

Post office address: 1-10-12-707, Kaminishi, Hirano-ku, Osaka-shi, Osaka 547-0005 JAPAN

Signature: Hajime Maekawa Date: June 9, 2000

☒ Additional inventors and/or prior applications are listed in attached Supplemental Sheet(s).



# Supplemental Sheet to U.S. Declaration and Power of Attorney

(BDWY-1 supp.)

## Additional Inventor(s):

I hereby declare that all statements made in the attached Declaration and Power of Attorney of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of inventor: Masao IKEZAKI

Citizenship: JAPAN

Residence (city, state, country): Neyagawa-shi, Osaka JAPAN

Post office address: 30-3-408, Miiminamimachi, Neyagawa-shi, Osaka 572-0019 JAPAN

Signature: Masao Ikezaki Date: June 9, 2000

Full name of inventor:

Citizenship:

Residence (city, state, country):

Post office address:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Full name of inventor:

Citizenship:

Residence (city, state, country):

Post office address:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Full name of inventor:

Citizenship:

Residence (city, state, country):

Post office address:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

## Additional Foreign/PCT Applications:

Foreign/PCT Application No.	Country	Filing Date	Priority Claimed? (yes/no)

## Additional U.S. Applications:

U.S. Application No.	Filing Date	Status (patented/pending/abandoned?)

## Additional Provisional U.S. Applications:

U.S. Provisional Application No.	Filing Date